C200

meeting room projector

Simply designed to be shared.

EASY TO SUPPORT

new projector design with standardized keypads, menus and interchangeable remotes—easy to use, easy to share, easy to support

COLOR-CODED CONNECTIONS

color-coded cables and velcro straps plug into matching color-coded ports

BRIGHT, CAPTIVATING IMAGES

2500 max ANSI lumens (standard mode) or 2000 max ANSI lumens (whisper mode) fill the screen, producing bright, captivating images

WHISPER QUIET

35dB (standard mode) ensure the only thing heard is your message— or switch it to whisper mode and experience 33dB with an extended lamp life of 3000 hours

PROJECTORNET™

manage the C200 over your corporate network

ProjectorNet networking

FLEXIBLE IMAGE PLACEMENT

the zoom lens allows a change in image size of up to 40% so images fit the screen perfectly from wherever the projector is located

DCDi™ by FAROUDJA

DLP™ A TEXAS INSTRUMENTS TECHNOLOGY

ASK

WHERE SOPHISTICATED DESIGN MEETS SIMPLE CONTROL

The C200 was designed around a new way of thinking and it is like nothing you've ever seen before in projector design. An intuitive standardized keypad with everything users need, right on top of the projector. No need for directions, manuals, or IT support calls. With color-coded connections and cables, users can connect the projector in seconds. The keypad is grouped by function and simple to use—whether users want power, source selection or fine-tuning. And for further ease of operation, users can rely on intuitive, icon-based menus—they simply scroll and select. Standardized, interchangeable remotes mean seamless projector control across all ASK projectors. No need for directions, manuals, or IT support calls. A built-in handle makes it easy for anyone to carry the projector or switch rooms at a moment's notice. With the C200, choosing to standardize on ASK couldn't be an easier choice.

FULLY EQUIPPED AND LOADED WITH OPTIONS

The C200 has it all. Connect up to five sources simultaneously—2 computer, 3 video for seamless switching and simple content integration. With the optical zoom lens on the C200—flexibility in image size and projector placement have never been easier. Images can be enlarged up to 40% in size with the 1.4:1 optical zoom lens—and with the digital pan/zoom users can highlight an area of the screen at the touch of a button. The C200 ships standard with the Conductor™ Plus remote, one of three new optional remotes to make projector control seamless. The C200 also ships with a new molded case that organizes the projector and accessories like a toolbox, putting an end to missing parts and cables. Using the color-coded slots for cables and parts—the user can quickly pack everything into the case. Anyone using the projector will know at a glance if something is missing.

INTEGRATING INTO YOUR WORLD

With InFocus® ProjectorNet™ software, you can command and control the C200 over your existing networks. Designed as a snap-in to the Microsoft® Management Console, InFocus ProjectorNet provides unique control features allowing for centralized management. Troubleshoot and control projector functions such as power-off to save lamp life—all from a single PC. Reducing total cost of ownership and reducing support time spent managing multiple projectors has never been easier. InFocus ProjectorNet means instant access to all networked projectors from your server or dedicated help desk.

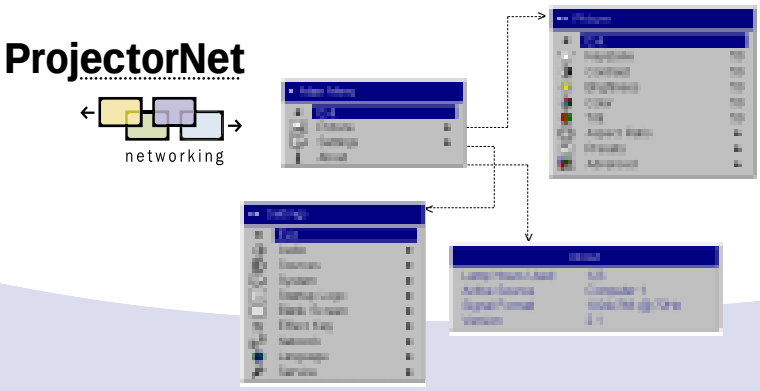



Presenter™ remote

Conductor™ Plus remote

DELIVERING THE FUTURE

Users count on you to bring them the latest technology. Only ASK delivers projectors today that are compatible with tomorrow. The C200 uses the newest DLP™ technology from Texas Instruments—a 0.7" DMD with Double Data Rate (DDR) chip that delivers twice the contrast ratio of other projectors in its class, yielding sharp, colorful images. The C200 includes cutting-edge technology that allows for future upgrades to ASK wireless connectivity.

SOPHISTICATED CONTROL AND COMMUNICATION

Exclusive ProjectorManager™ control software allows projector control via the PC. Adjust control source, color, tint, brightness and keystone quickly and easily from the computer. Users can now enhance presentation effects or even customize logos and startup screens. And should users need IT support, ProjectorManager sends a snapshot of the projector information. ProjectorManager even provides the ability to freeze the projected image for changes without distracting others looking at the screen. With an ASK projector, users are always in control.

SOMETHING FOR EVERYONE

The new ASK C200 will change the way your organization shares information. Users will be self-sufficient, taking advantage of easy projector setup and configuration. Everyone will benefit from the simple, standardized interface. Collaboration with the C200 will quickly become a vital part of every effective meeting. Outfitting your conference rooms with the right projection solution has never been easier.

LEADERSHIP BUILT ON QUALITY

InFocus Corporation is the worldwide leader in digital projection. That's why the most demanding businesses insist on InFocus products for unquestionable reliability engineered into the most streamlined machine.

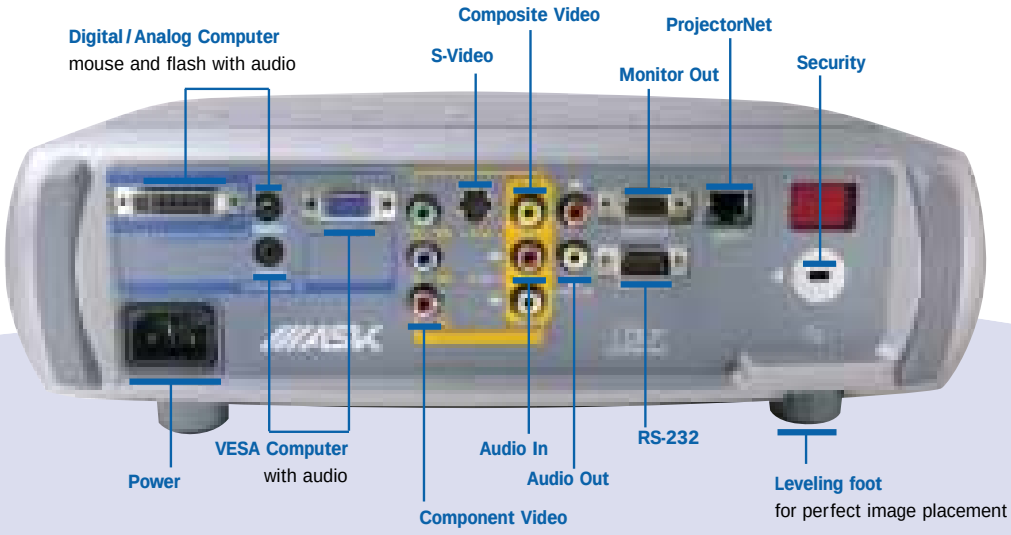

TECHNICAL SPECIFICATIONS

Native Resolution	• XGA 1024 x 768
Display Technology	• DLP™ by Texas Instruments: 0.7" XGA DMD DDR
Input Sources	• Computer 1 (M1-DA), video (S-Video 6-pin mini DIN, component RCA through S-Video adapter, and composite video RCA), audio (3.5 mm mini-jack)
Output Sources	• Monitor out (VESA)
Computer Compatibility	• SXGA, XGA, SVGA, VGA, Macintosh®, HDTV (1080i and 720p RGBHV)
Video Compatibility	• Full NTSC, PAL, SECAM, EDTV (480p, 576p), HDTV (720p, 1080i)
Brightness	• 2500 max ANSI lumens (standard mode); 2000 max ANSI lumens (whisper mode)
Brightness Uniformity	• +30 / -40
Contrast Ratio	• 800:1 full on/full off
Number of Colors	• 16.7 million
H-Synch Range	• 50 - 117 kHz
V-Synch Range	• 50 - 85 Hz
Dot Clock:	• 135 MHz
Lens Shift	• 115% image offset
Digital Keystone Correction	• +/- 20° vertical correction; data/video
Projection Lens	• Zoom lens with manual focus and manual zoom adjust
Zoom Ratio	• 1.4:1
Minimum Projection Distance	• 1.5 m (maximum distance 9.8 m)
Aspect Ratio	• 4:3
Image size (diagonal)	• 0.7m to greater than 6.7m
Projection Methods	• Front, rear, ceiling
Audio	• 2 x 2-Watt mono
Control	• Projector keypad, ProjectorManager™, RS-232, NIC (RJ45), Wired control through USB
Lamp	• 250W UHP/2000 hours* (standard mode); 200W UHP/3000 hours* (whisper mode)
Dimensions	• 110mm (H) x 351mm (W) x 325mm (L)
Weight	• 4.24 kg
Power Consumption	• 350-Watt
Power Supply	• 100V - 240V at 50 - 60 Hz
Operating Temperature	• 10° to 35° C at sea level (0 to 10,000'); 50° to 95° F
Menu Languages	• English, Spanish, French, German, Japanese, Korean, Portuguese, Italian, Norwegian, Russian, Simplified Chinese, Traditional Chinese
Audible Noise	• 35dB (standard mode); 33dB (whisper mode)
Approvals	• UL, CSA, TUV, C Tick, NOM, MIC, GOST, IRAM, CCC, S-JQA, FCC A, EN55022, ICES-003
Lamp Warranty	• 90 days or 500 hours
Warranty	• 2 years parts and labor
Accessories Warranty	• 1 year

*Actual lamp life may vary based on the ambient environment. Conditions that may affect lamp life include temperature, altitude, or switching between standard and low power modes.

SERVICE YOU CAN COUNT ON

For outstanding service and support that's there when you need it, InFocus® Corporation's service programs offer you peace of mind—it's customer care you can count on. For more information on service program details for your region, please visit

www.infocus.com/service/service_offerings

PROJECTION DISTANCE/IMAGE SIZES†

Distance to Screen		Minimum Diagonal Image Size Throw Ratio: 0.48		Maximum Diagonal Image Size Throw Ratio: 0.67		Minimum Horizontal Image Size Throw Ratio: 2.63		Maximum Horizontal Image Size Throw Ratio: 1.88	
5.0'	1.5 m	2.4'	0.7m	3.4'	1.0m	1.9'	0.6m	2.7'	0.8m
10.0'	3.0m	4.8'	1.5m	6.7'	2.0m	3.8'	1.1m	5.3'	1.6m
15.0'	4.6m	7.2'	2.2m	10.1'	3.1m	5.7'	1.7m	8.0'	2.4m
20.0'	6.1m	9.6'	2.9m	13.4'	4.1m	7.6'	2.3m	10.6'	3.2m
30.0'	9.1m	14.4'	4.4m	20.1'	6.1m	11.4'	3.5m	15.9'	4.8m
32.8'	10.0m	15.7'	4.8m	22.0'	6.7m	12.5'	3.8m	17.4'	5.3m

† Metric conversions are approximate. Diagonal throw ratio = (distance/diagonal image size); Horizontal throw ratio = (distance/horizontal image size)

SHIPS STANDARD WITH:

- Exclusive ASK Organizer molded carry case
- Conductor™ Plus full-featured remote with laser pointer
- Color coded cable straps
- M1-DA analog computer cable with USB
- 3.5mm computer audio cable
- RCA audio/video cable
- Power cord
- Projector System CD: Includes multi-language user manual, Quick Start Guide, ProjectorManager™ control software, ProjectorManager Installation Guide, ProjectorManager User Manual
- Quick start guide
- User manual

Optional Accessories

CA-ATA-013	ATA Shipping Case
CASE-801	Samsonite® deluxe Travel Case
SP-DVI-CARD	Digital/Analog Interface Card
SP-DVI-D	Digital Computer Cable
HW-PRESENTER	The Presenter™ IR Presentation Remote Control
HW-INTEGRATOR	The Integrator™ IR Systems Remote with laser
SP-CEIL-005	Projector Mount
SP-LTMT-PLT	False ceiling plate
SP-LTMT-EXTP	Mounting extension arm
SP-LOCK	PC Guardian Projector Cable Lock
A650	1.27m Diagonal Size Portable Projection Screen
HW-DLXSCRN	1.52m Diagonal Size Deluxe Insta-Theatre Screen
HW-WALLSCR84	2.11m Diagonal Size Pull-Down Screen
SP-LAMP-006	Replacement Lamp
SP-LTMT-PLT	False ceiling plate
SP-LTMT-EXTP	Mounting extension arm

Exclusive ASK Organizer molded carry case

Call ASK or your dealer today to arrange a demonstration.

www.askprojectors.com **www.infocus.com**

InFocus Corporate Headquarters: 27700B SW Parkway Avenue • Wilsonville Oregon 97070-9215, USA • Phone: 503-685-8888 • 1-800-294-6400 • Fax: 503-685-8887

In Europe: InFocus International BV • Strawinskylaan 585 • 1077 XX Amsterdam • The Netherlands Phone: (31) 20 5792000 • Fax: (31) 20 5792999 • Freephone: 008000 4636287 (008000 INFOCUS)

In Asia: 238A Thomson Road • #18-01/04 Novena Square • Singapore 307684 Telephone: (65) 6334-9005 • Fax: (65) 6333-4525

InFocus Norge AS: K.G. Meldahlsvei 9 • Postboks 1403 • 1602 Fredrikstad, Norway Tel: (+47) 69 38 11 00 • Fax: (+47) 69 34 06 32 • Email: firmapost@infocus.com

InFocus and ASK are registered trademarks and ProjectorNet and ProjectorManager are trademarks of InFocus Corporation. All other trademarks are used with permission or are for identification purposes only and are the property of their respective companies.©2003 InFocus Corporation. All rights reserved. 2/03 825-0096-00 C200_DS_E.qxd